

NEW!

Since 1955
Kalwall with...

The most thermally effective, light-transmitting skylight in the world.

nanogel TRANSLUCENT AEROGEL

R-20 Insulation with 20% light transmission now available!




Insulated Unit Skylights

Panel Specs

- Thickness: 2³/₄"
- Exterior face: Crystal SW
- Interior face: Crystal S-171
- U-Factor: .05 = R20
- Light transmission: 20%

Skylight

- Minimum pitch: 3/8" in 12"
- Live load max: 60 psf

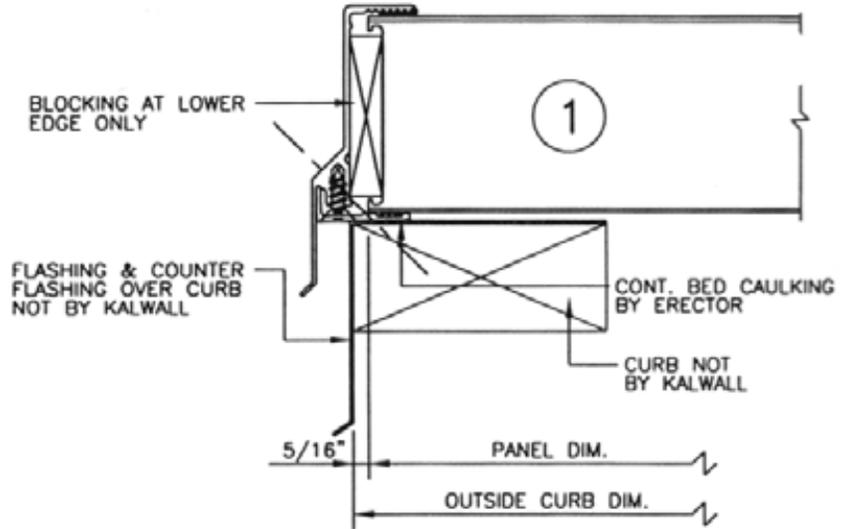

Perimeter corners are factory mitered and welded. Perimeter factory-assembled to panels.

Choose finish options for exposed aluminum


- Mill Finish
- Black
- White
- Aluminum

Size	1-5 Units	6-10	11-50	Order Qty.	Total Cost
4' x 6'	\$ 960	-5%	-10%		
4' x 7'	\$1,120	-5%	-10%		
4' x 8'	\$1,280	-5%	-10%		
4' x 9'	\$1,440	-5%	-10%		
4' x 10'	\$1,600	-5%	-10%		
4' x 11'	\$1,760	-5%	-10%		
4' x 12'	\$1,920	-5%	-10%		
				Materials FOB, plus freight:	
				Plus tax:	


Since 1955
Kalwall

Always... Light-years Ahead!™


1111 Candia Road, P.O. Box 237, Manchester, NH 03105
 Phone: (603) 627-3861, ext. 4433 or (800) 258-9777 • Fax: (603) 627-7905
 www.kalwall.com • email: info@kalwall.com

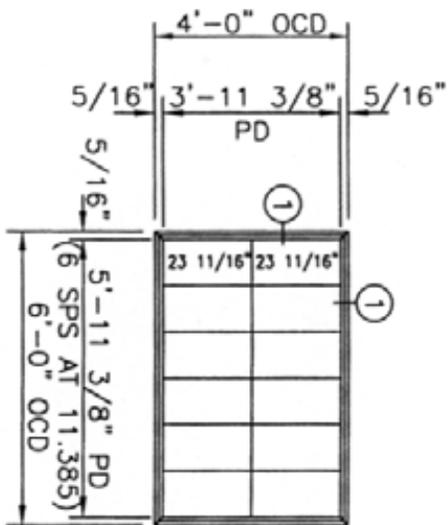


4' x 6' Unit

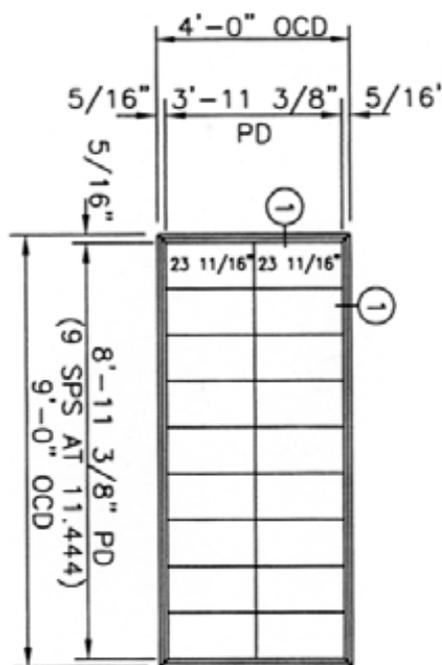


4' x 9' Unit

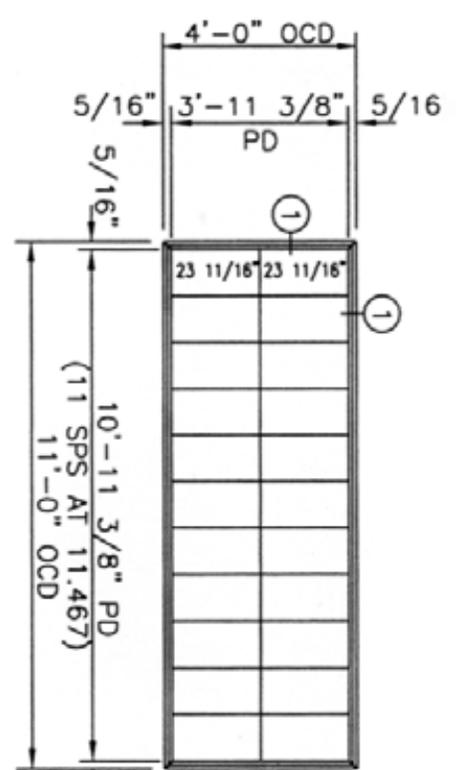


4' x 11' Unit

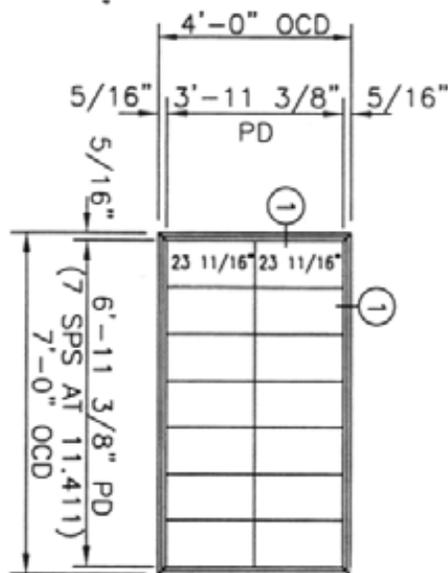


4' x 7' Unit

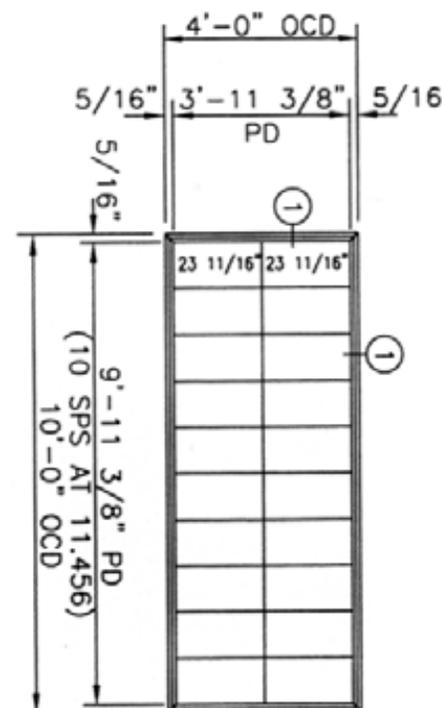

4' x 10' Unit

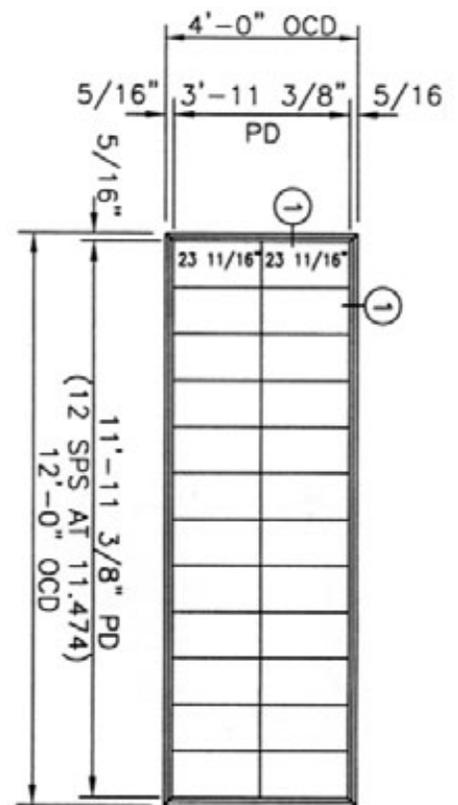

4' x 12' Unit

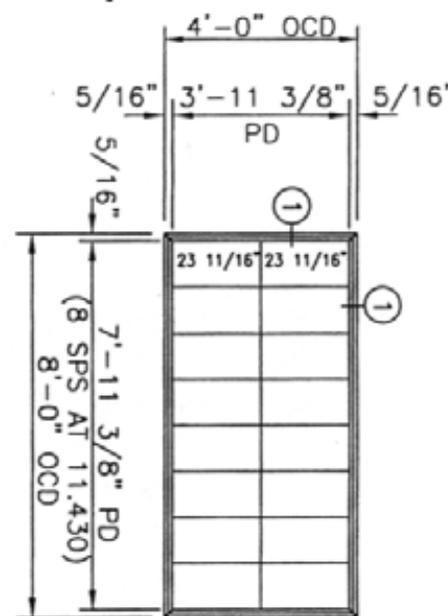

4' x 8' Unit

Units can be installed with slope in either direction.

Tolerances $\pm \frac{3}{32}$ "

Since 1955
Kalwall

STANDARD UNIT NANOGEL® SKYLIGHTS